




## MAIN SPECS

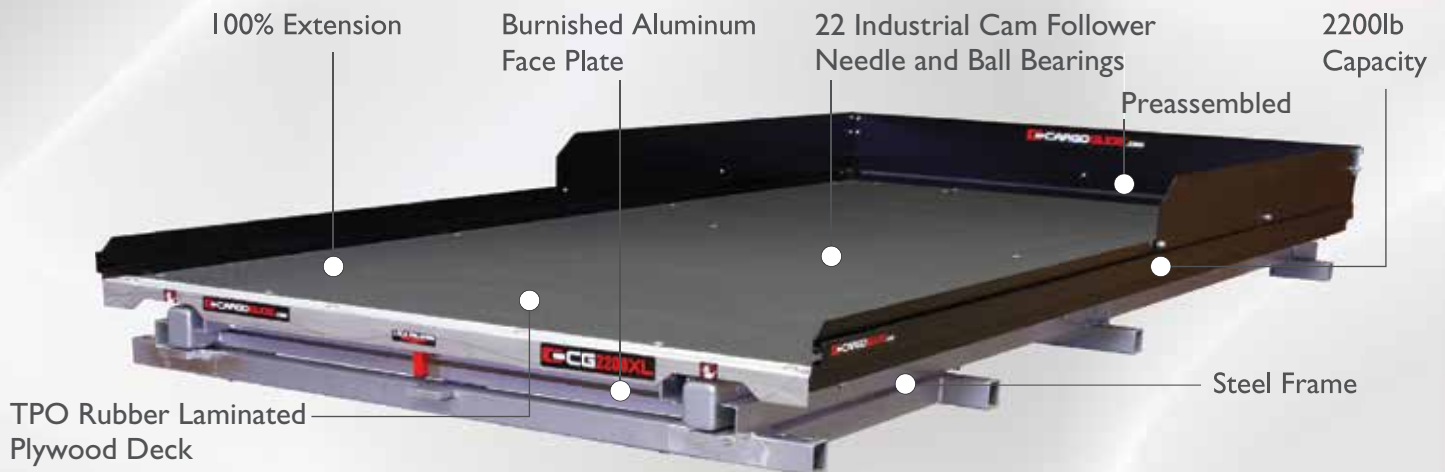

## CAPACITIES

|                                     |  |
|-------------------------------------|--|
| <b>Payload Distributed Capacity</b> | <b>2200 lbs</b>                                  |
| <b>Tie-down Load Rating</b>         | <b>400 lbs per tie-down</b>                      |
| <b>Bearing Load Rating</b>          | <b>Combined Load Rating of Bearings = 59,770</b> |
| <b>Load Carrier</b>                 | <b>2 @ 4840 ea./18 @ 2508 ea.</b>                |
| <b>Side-Thrust</b>                  | <b>2 @ 3019 ea.</b>                              |
| <b>Plus-Nut Rating (1/8" steel)</b> | <b>N/A</b>                                       |
| <b>Extension</b>                    | <b>4 - 6 @ 1500 lbs. each</b>                    |
|                                     | <b>100%</b>                                      |

## DIMENSIONS / WEIGHT RANGES

|                                      |                                 |
|--------------------------------------|---------------------------------|
| <b>Length</b>                        | <b>48" - 95"</b>                |
| <b>Width</b>                         | <b>24" - 48"</b>                |
| <b>Profile/ Deck Height (inches)</b> | <b>5" Low Profile 6 1/2 Std</b> |
| <b>Side Rails</b>                    | <b>4" with 8" High Sides</b>    |
| <b>Grab Rail</b>                     | <b>Based on width of unit</b>   |
| <b>Weight</b>                        | <b>339 - 439 lbs</b>            |

**2200 lb capacity.** 100% of the Cargo Tray Length Slides Out for Total Access to your Cargo. Real plywood deck with a TPO Rubber laminated surface for strength and durability. 22 Industrial Cam Follower Needle and Ball Bearings provide Dependable Lasting support for the Cargo You Haul in Your CargoGlide. Powder Coated Industrial 4" high extruded 6061-T6 Thick Aluminum Side Rails with integrated Full Perimeter Tie-Down Tracks and 4 Infinitely Adjustable Eyebolt Tie-Downs to make securing cargo easy and versatile. Includes 8" High Side Extensions on the first four feet of the rails at the cab end, helps contain more cargo.

**Custom Sizes Available**

